
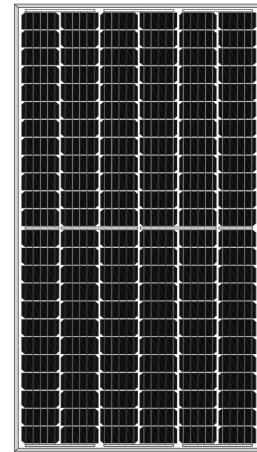


400W Mono half cells solar panel (2008*1002*40)

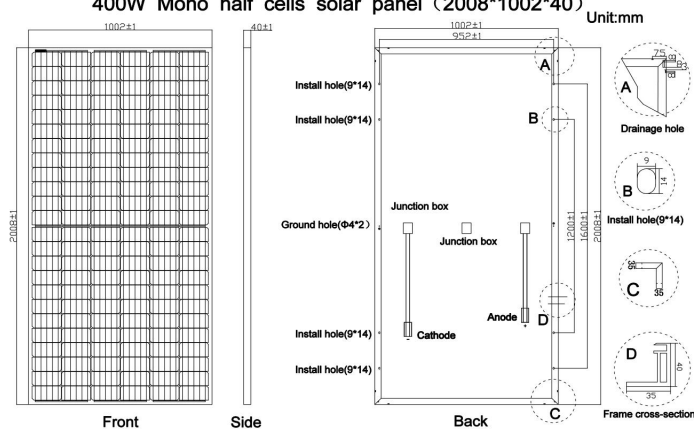

Specifications

* STC: irradiance 1000 W/m², AM 1.5, and cell temperature of 25°C


Peak Power(Pmax)	400.00
Maximum Power Voltage(Vmp)	40.70
Maximum Power Current(Imp)	9.84
Open Circuit Voltage(Voc)	48.70
Short Circuit Current(Isc)	10.79
Cells Efficiency(%)	22.05
Module Efficiency(%)	19.88

* NOCT: irradiance 800 W/m², AM 1.5G, ambient temperature 20°C, wind speed 1 m/s

Peak Power(Pmax)	297.00
Maximum Power Voltage(Vmp)	37.73
Maximum Power Current(Imp)	7.88
Open Circuit Voltage(Voc)	46.48
Short Circuit Current(Isc)	8.35

Maximum System Voltage(V)	1000/1500
Maximum Series Fuse Rating(A)	20
Power Tolerance	0 ~ +3 %
Pmax Temperature Coefficients(W/°C)	-0.360 %
Voc Temperature Coefficients(V/°C)	-0.289 %
Isc Temperature Coefficients(A/°C)	+0.051 %
NOCT Nominal Operating Cell Temperature(°C)	45±2
Operating and Storage Temperature(°C)	-40 ~ +85

Warranty

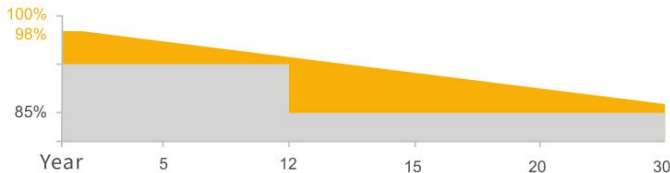

12
YEARS

Guarantee on product material and workmanship

30
YEARS

Linear Power output warranty



Mechanical characteristics

Cell Type	158.75x79.38 PERC Mono
No. of Cells	144(12x12)
Dimensions	2008*1002*40
Weight	23.00kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP68 3 diodes
Output cables	4mm ² cable 55cm include mc4
MaxWind Load/Snow	2400Pa/5400Pa

Packing list

20FT container	12 Packages/ 292pcs
40HQ container	22 Packages/660PCS

Product Standard

Product Performance	IEC61215
Product Safety	IEC61730

IV Cure

